


18.	POLYETHELENE BOARD	SUPREME OR EQUIVALENT
19.	ALUMINIUM EXTRUSIONS	JINDAL, HINDALCO, INDALCO OR EQUIVALENT
20.	STAINLESS STEEL	SALEM, JINDAL OR EQUIVALENT
21.	EXPANSION, FASTENERS	FISCHER, HILTI, ANCHORS, AXEL
22.	FLOAT GLASS	MODI GUARD, SAINT GOBAIN, ASAHI, ATUL
23.	CERAMIC TILES	NITCO, KAJARIA, SOMANY, JOHNSON, VARMORA
24.	VITRIFIED PORCELINE TILES	NAVEEN DIAMOND TILES, NITCO, JOHNSON, MARBITO BRAND, RAK, KAJARIA, VARMORA, CT TILES
25.	INTERLOCK TILES/GRASS PAVER BLOCKS/ KERB STONE	DALAL TILES, UNISTONE, MODERN OR EQUIVALENT
26.	TERRAZZO TILES	NITCO, MODERN, A-1, NTC, DALAL TILES OR EQUIVALENT AS PER ISI SPECIFICATION
27.	CEMENT CONCRETE TILES	UNISTONE, ULTRA, DALAL TILES OR EQUIVALENT
28.	HANDMADE CERAMIC TILES	RAJA, ARIHANT, JAIN
29.	ROOF WATER PROOFING	NINA CONCRETE SYSTEM PVT. LTD, C R S ASSOCIATES AND ENGINEERS PVT.LTD, CREATIONS,PIDILITE
30.	PAINT	NEROLAC, JOHNSON & NICHOLSON, BERGER, ASIAN PAINTS, SHALIMAR
31.	TEXTURED COATING	UNITILE, SPECTRUM, HERITAGE OR EQUIVALENT
32.	DOOR FITTINGS	GODREJ, DOORSET, OZONE, INDOBRASS
33.	LOCKS AND HANDLES	EVERITE, GODREJ, HARRISON, INDOBRASS
34.	NON METALLIC COMPOUND	HARDENER FOSROC, S TP, PIDILITE, CICO
35.	ROLLING SHUTTER	RAMA, PRAKASH, SANJEEV OR EQUIVALENT AS PER CPWD SPECIFICATIONS.
36.	DOOR CLOSER	DOORSET, EVERITE, GREEZ, GODREJ
37.	FLOOR DOOR SPRING	D-LINE, OZONE, DOORSET, EVERITE, INDOBRASS
38.	HDF LAMINATED BOARD	ARMSTRONG, BVG, EGO FLOORS, SQUARE FOOT, ACTION TESA
39.	EXPANSION FASTENERS	HILTI, FIHSER, GKW, AXEL
40.	FASTENERS	HILTI, FIHSER, GKW, AXEL
41.	GYPSUM CEILING	INDIA GYPSUM, LAFARGE
42.	CALCIUM SILICATE BOARD FALSE CEILING	AEROLITE, HYLUX
43.	PATCH FITTING	DORMA, GEZE, OZONE OR AS APPROVED
44.	WORK STATION AND MODULAR FURNITURE	GODREJ, BP ERGO, FEATHERLIGHT, WIPRO
45.	BLINDS	VISTA, MAX, ARMSTRONG
46.	ADHESIVE	FEVICOL, VEMICOL OR EQUIVALENT
47.	FURNITURE HARDWARE	HATTICH INDIA, EBCO, EARL BEHARI
48.	LACQUERED GLASS	SAINT GOBIN, ASAHI, ATUL
49.	MELAMINE POLISH	ASIAN PAINT, BERGER, TIMBER STONE OF ICI DOLEXZ, WUDFINE OF PIDILITE
50.	Sandwich PUF Panel	SINTEX, JINDAL, SYNERGY THYRISLINGTON

SQUARE HOLLOW SECTIONS

20 X 20 MM

IS 4923

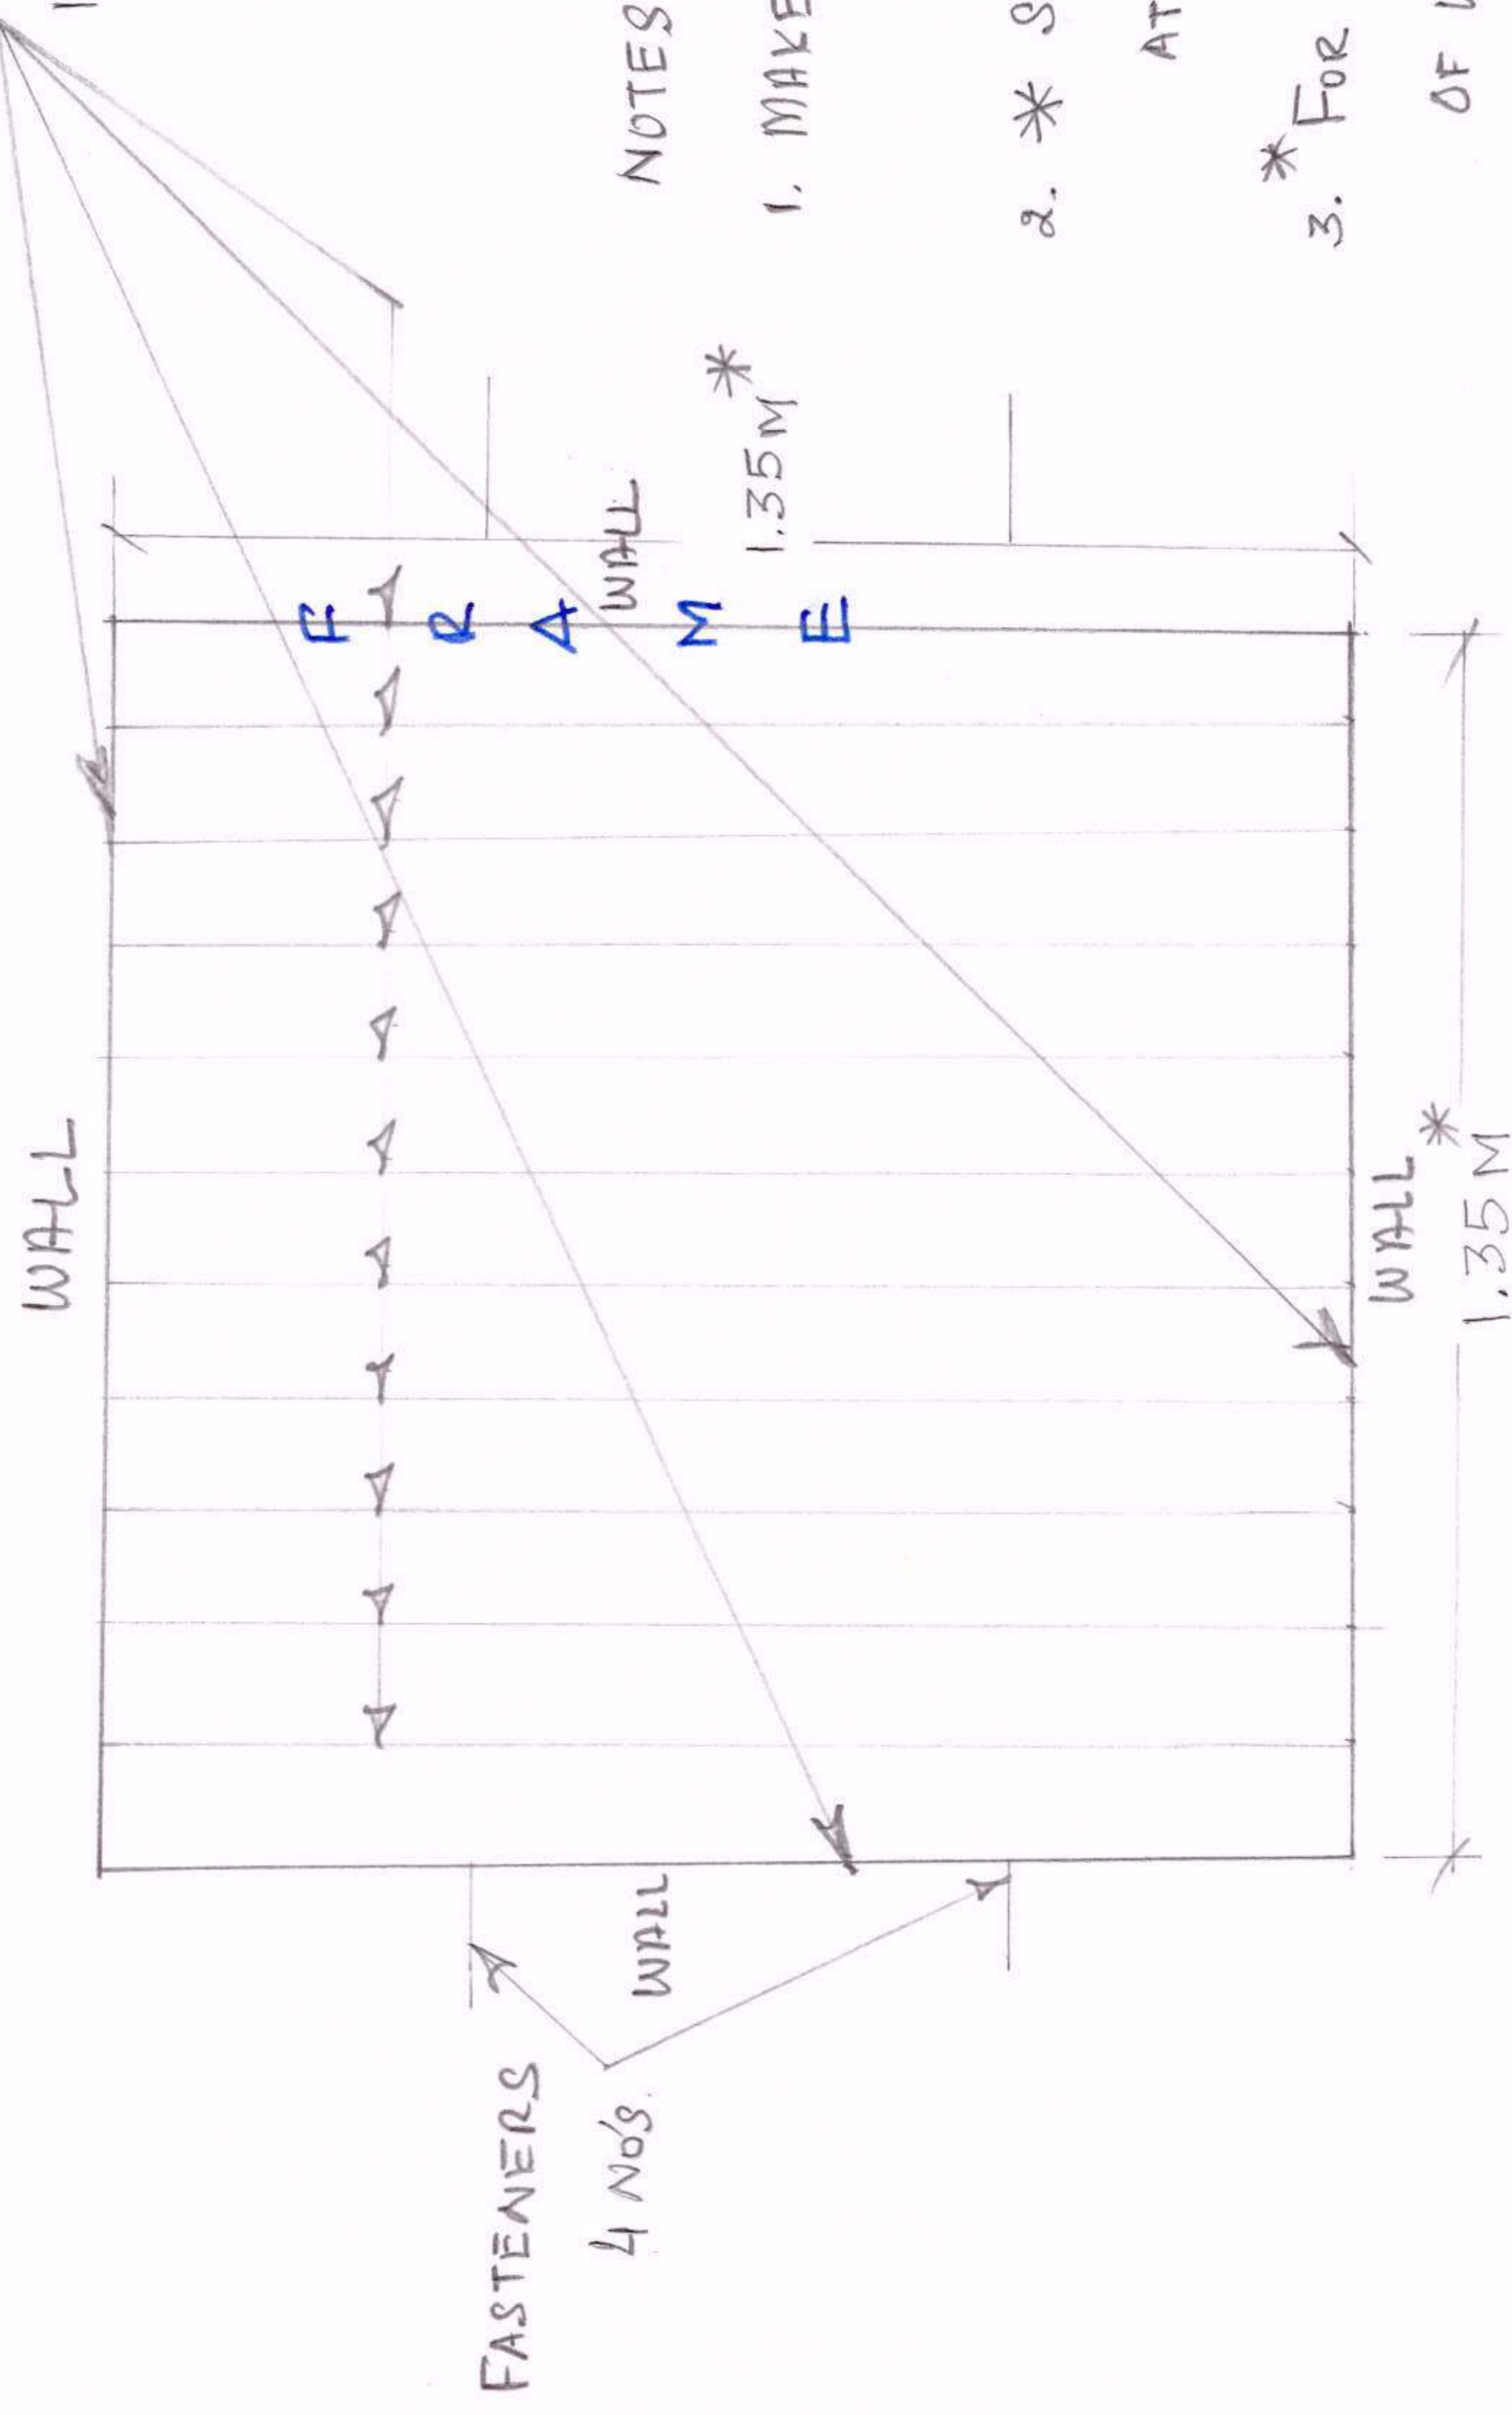

NOTES

1. MAKE: TATA/SAIL/JINDAL RINL

2. * SIZES TO BE VERIFIED AT SITE FOR ACTUALS.

3. * FOR SIZES REFER SCOPE OF WORK.

4. PAINT COLOUR:

- a) BEAS : OFF WHITE
- b) CHENAB : OFF WHITE
- 5. NTR

Sum.
25/09/2019

M: METER

NTS: NOT TO SCALE

MM: MILLIMETER

PART – C

Format "A"						
Providing and fixing mild steel grills on the ground floor in Chenab hostel and Beas hostel						
Proforma for Quoting the rates						
Sr. No	Item Description	Estimated Cost (in Rupees)	Percentage ABOVE or BELOW the Estimated Cost	Percentage (%) In Figures	Percentage (%) in Words	Total Cost (in Rupees)
		Rs 10,20,429				
1	Steel Work in built up tubular (Round, square or rectangular hollow tubes etc.) trusses etc. including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special washers, etc. complete. (Hot finished welded tubes)					
2	Structural steel work riveted, bolted or welded in built up section, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.					
3	Painting with synthetic paint of approved brand and manufacture to give an even shade. Two or more coats on new work.					
4	Providing and fixing carbon steel galvanised (minimum coating 5 micron) dash fastener of 10 mm dia double threaded 6.8 grade (yield strength 480n/ mm ²), counter sunk head, comprising of 10 mm dia polyamide PA 6 grade sleeve, Including drilling of hole in frame, concrete/ masonry, etc. as per direction of Engineer-in-charge.					
	10X60 mm					


 15/11/19

Format "B"**Schedule of Work**

Sr. No	Description of work	Unit	Quantity	Rate (in Rs)	Amount (in RS)
	Steel Work in built up tubular (round, square or rectangular hollow tubes tec.) trusses etc. including cutting hosting, fixing in position and applying coat of approval steel primer, including welding and bolted with shaped washers, etc. complete				
1	Hot finished welded tubes	kg	5990	143.45	859265.50
2	Structural steel work riveted, bolted or welded in built up Sections , trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete	kg	78	101.75	7936.50
3	Painting with synthetic enamel paint of approves brand and manufacture to give an even shade. Two or more coats on new work.	sqm	384	121.55	46675.20
4	Providing and fixing carbon steel galvanised (minimum coating 5 micron) dash fastener of 10 mm dia double threaded 6.8 grade (yield strenth 480N/mm2), counter sunk head, comprising of 10 mm dia polyamide POA 6 grade sleeve, Including drilling of hole in frame, concrete/ masonry, etc. as per direction of Engineer-in-charge				
	10X60 mm	each	1028	103.65	106552.20
Total Amount					1020429

AS
15/11/19